

The Future of Wildfire Defense

Model Description
Louvered

Model Number
FSVG1418FF

Model Size
14" x 18"

Flange Type
Flange Front

NEVA
86 si

Project Notes



WILDFIRE / WILDLAND URBAN INTERFACE (WUI) COMPLIANCE




ASTM E2886/E2886M-20 tested

OSFM BML Listing No. 8165-2426 || QAI Listing No. B1155-2

Supports compliance with applicable CWUIC / IWUIC vent provisions

Meets IBHS Wildfire Prepared Home[™] performance-based vent requirements

Code Compliance Note: Product suitability and code compliance depend on the specific model, listed configuration, installation orientation, installation method, project location, adopted code edition and local amendments. Final acceptance is subject to the Authority Having Jurisdiction.

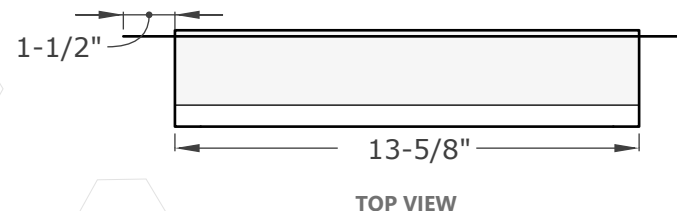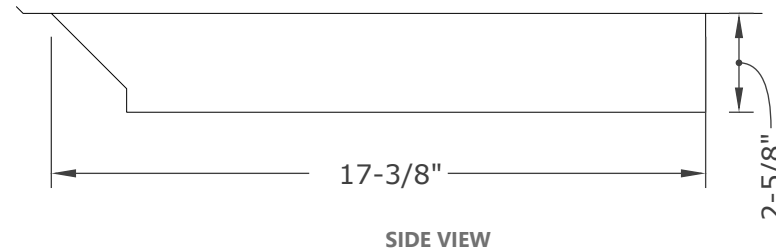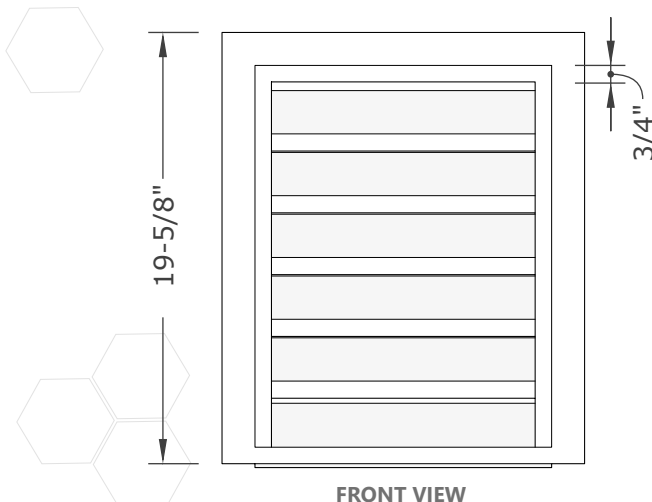

Installation

Always measure rough opening to confirm a proper fit. There should be no gaps greater than 1/16" after installation.

Additional waterproofing sealant may be required after installation, along edge of nailing flange, if exposed.

V2 Vents can be painted safely - Ensure metal screens do not clog when painted. Properly prepared galvanized steel before painting - clean with soap and water, micro etching and/or primer before painting.

Required:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** nailing flanges prior to installation.

Material Specifications

Frame & Flange:	G90 Galvanized Steel - 26GA
Intumescent Core:	V2 [™] Honeycomb Matrix
Ember Mesh:	14 Mesh - 304 Stainless Steel
Pest Screen:	Stainless Steel Screen - 1/8" (faces exterior)

