




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

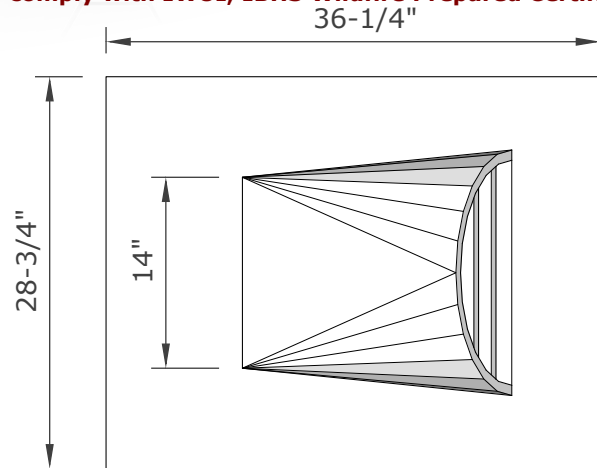


TOP VIEW

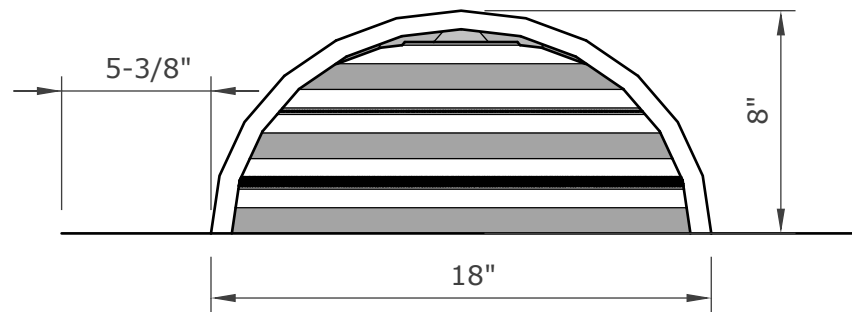


FRONT VIEW



Intumescent Core

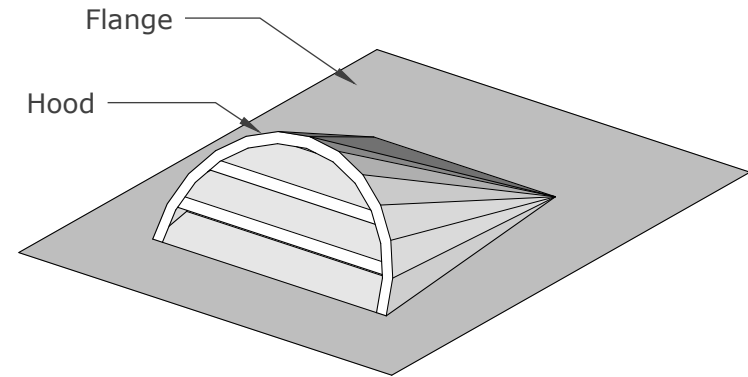

ISOMETRIC VIEW

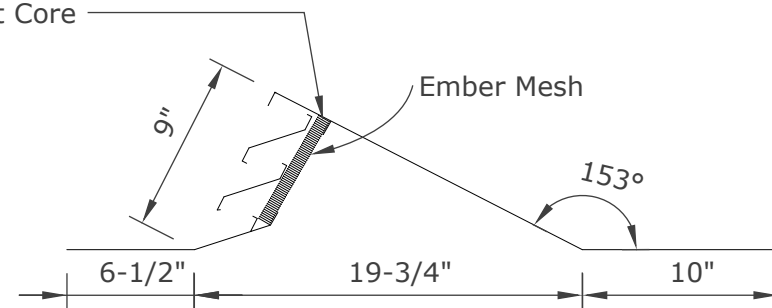

SECTION VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVDHR918 PRODUCT SPECIFICATION & DATA SHEET

Model Description	Half Round Dormer Vent	Flange Type	Standard	Hood & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVDHR918	NFVA	51 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	18" X 9"			Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:



www.newcalmetals.com