



Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155




Revision Date: February 24, 2020




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

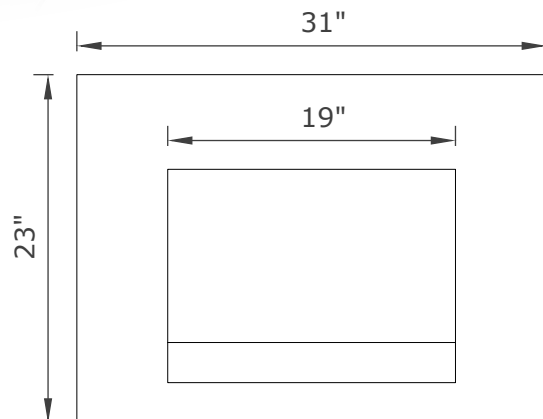


TOP VIEW

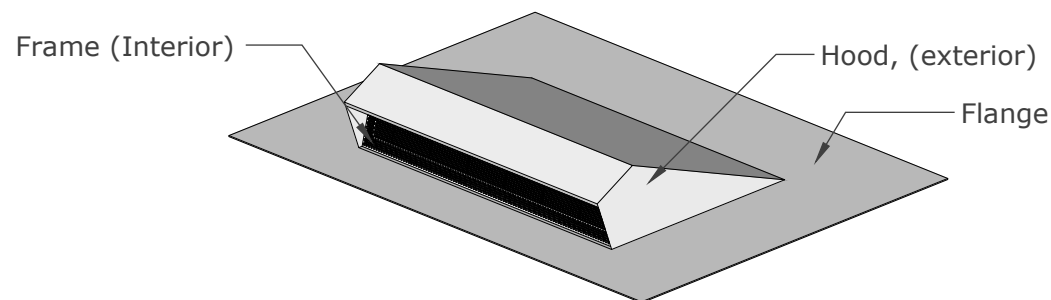


ISOMETRIC VIEWS

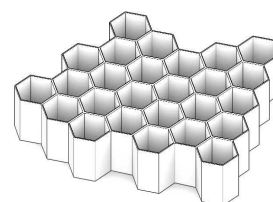

Intumescent Core

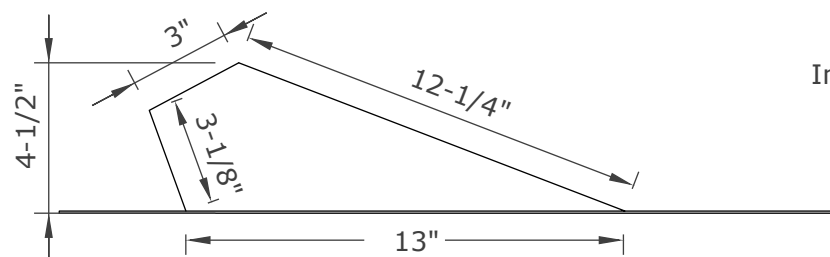

SIDE VIEW

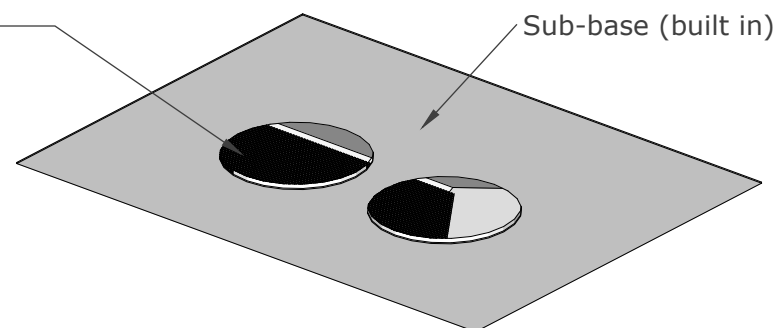

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.

For application details and installation examples, please visit www.V2Vents.com

FSVDLR419 PRODUCT SPECIFICATION & DATA SHEET

Model Description	Standard Dormer Vent	Flange Type	Standard	Hood & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVDLR419	NFVA	52 sq. in.	Frame (Int)	G90 Galvanized Perforated Steel - 24GA
Model Size	4-1/2" x 19"			Intumescent Core	6mm Hexagonal Matrix - Aluminum with intumescent coating
				Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:



www.newcalmetals.com

