




TOP VIEW

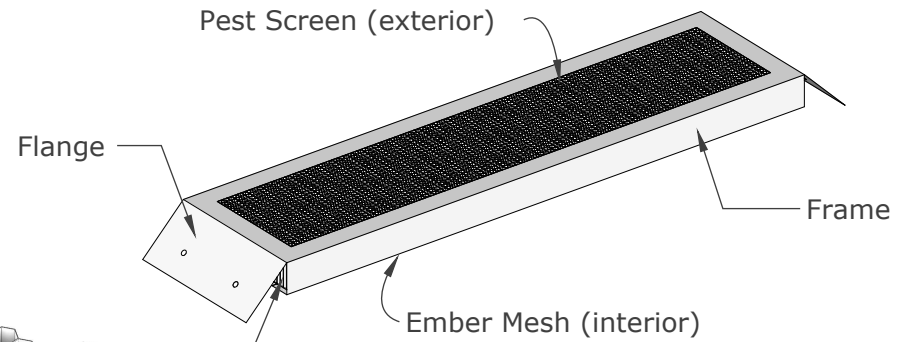


ISOMETRIC VIEW



Intumescent Core

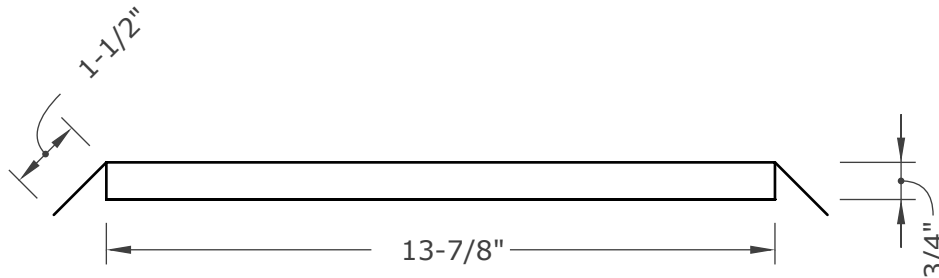

SIDE VIEW

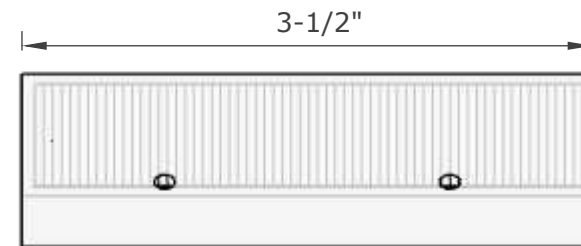

END VIEW (X-Ray)

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVE3514RT PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Eave Vent	Flange Type	Reverse Tab	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVE3514RT	NFVA	24 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	13-7/8" x 3-1/2"			Ember Mesh	14 Mesh - 304 Stainless Steel (Faces interior)
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)