




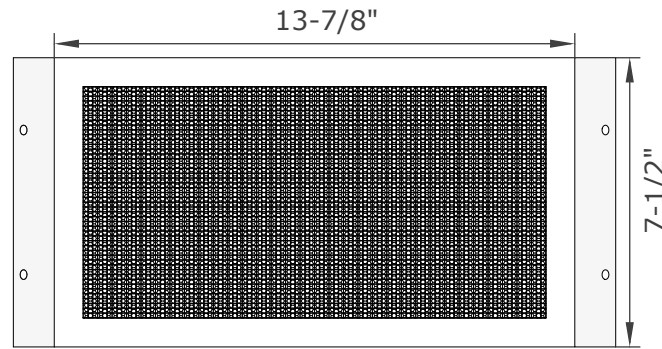


TOP VIEW

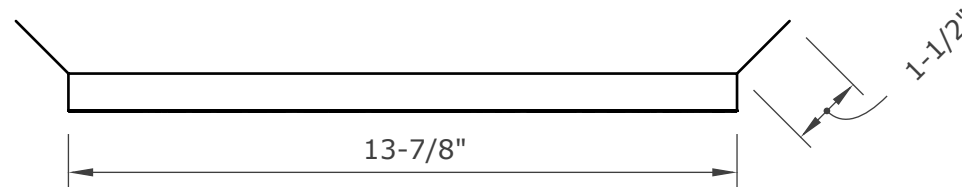

SIDE VIEW

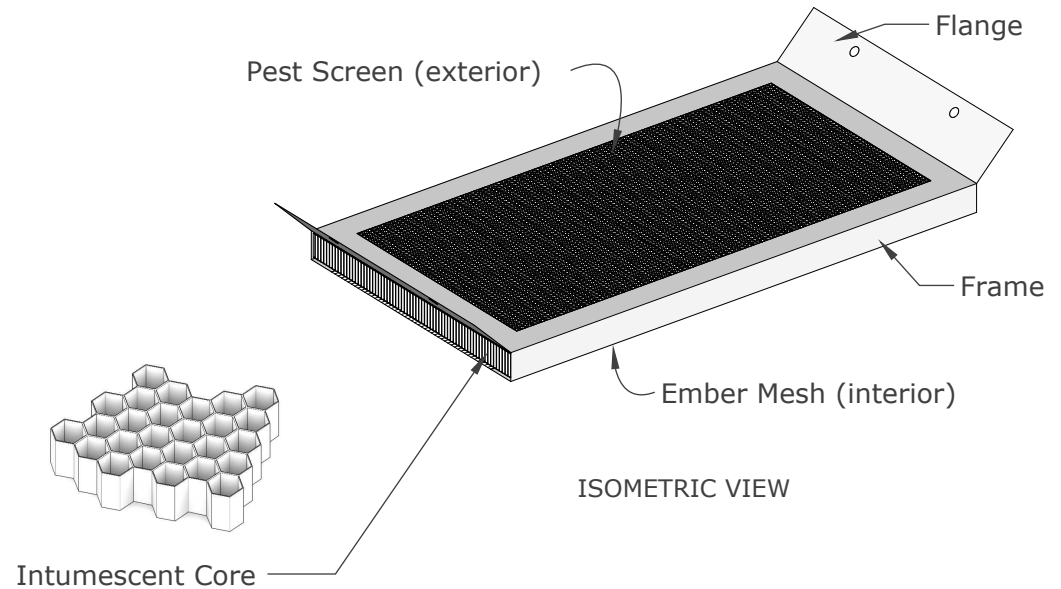

ISOMETRIC VIEW

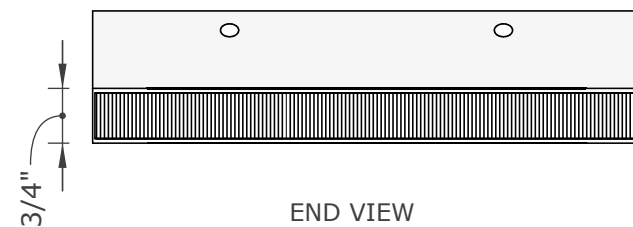

END VIEW

**Required Installation:**

**Use EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.  
For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

## FSVE7514 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

|                   |                         |             |                   |                  |                                                                 |
|-------------------|-------------------------|-------------|-------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Eave Vent</b>        | Flange Type | <b>Standard</b>   | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>FSVE7514</b>         | NFVA        | <b>75 sq. in.</b> | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>13-7/8" x 7-1/2"</b> |             |                   | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel (Faces interior)</b>           |
|                   |                         |             |                   | Pest Screen      | <b>Stainless Steel Screen - 1/8" (Faces exterior)</b>           |