



Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155




Revision Date: February 27, 2021




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

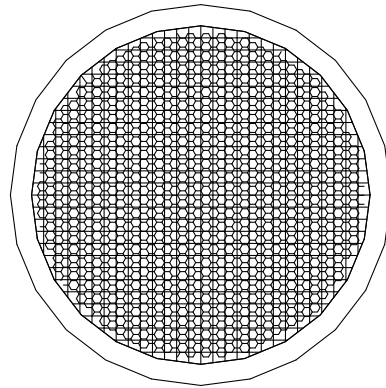

TOP VIEW




Intumescent Core

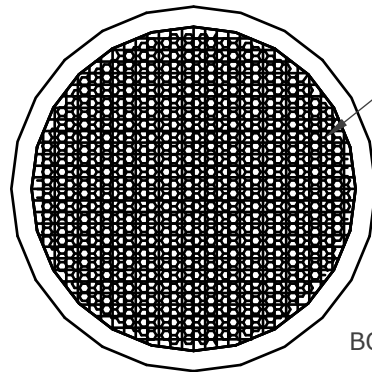

BOTTOM VIEW


AMBER MESH

FLANGE



FRAME

ISOMETRIC VIEW

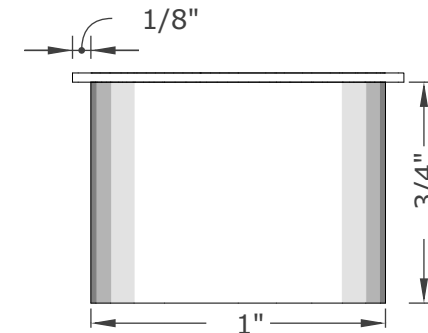

SIDE VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.

For application details and installation examples, please visit www.V2Vents.com

FSVER1M PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Round Eave Vent	Flange Type	NFVA	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVER1M	Flange Front	1 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	1" x 1"			Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)