



Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155




Revision Date: February 25, 2020




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

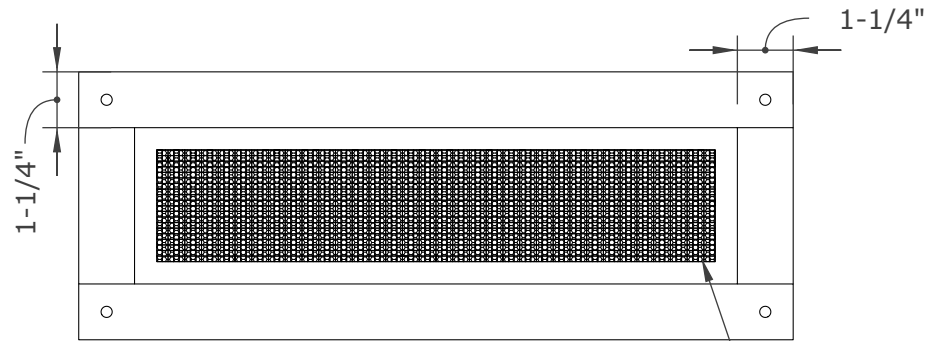


TOP VIEW

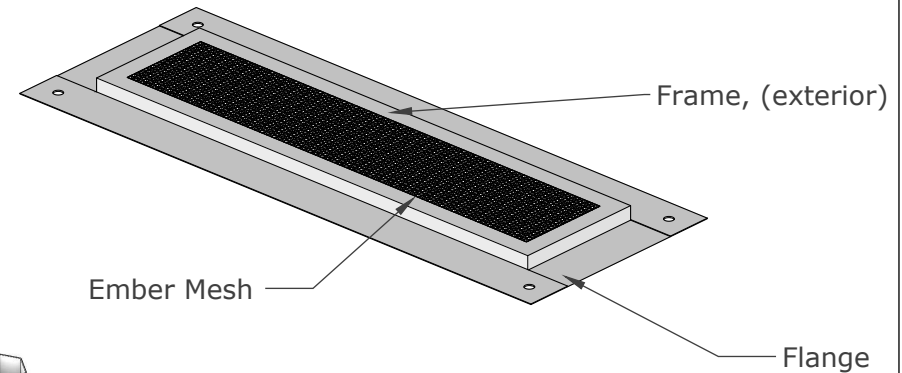


ISOMETRIC VIEW



Intumescent Core

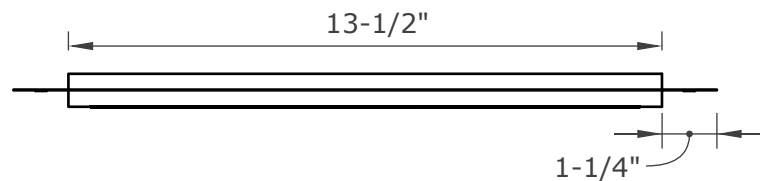

FRONT VIEW

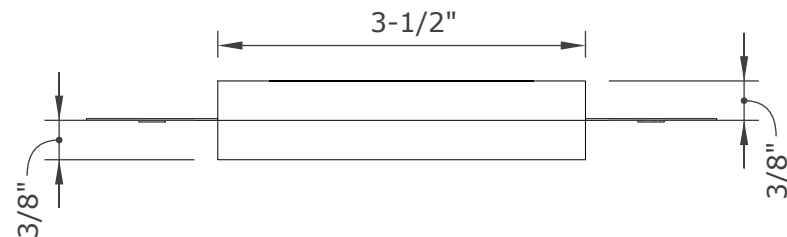

SIDE VIEW

Required Installation:


Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVFS414FC PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com



Model Description	Standard Soffit Vent	Flange Type	Fiber Cement	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVFS414FC			Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	13-1/2" x 3-1/2"	NFVA	24 sq. in.	Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)