




TOP VIEW

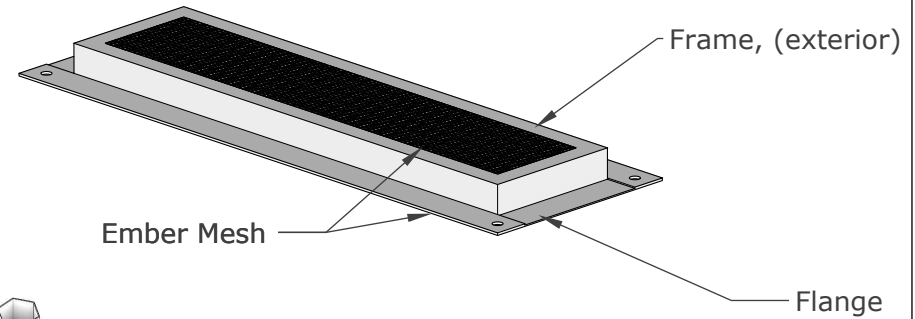


ISOMETRIC VIEW



Intumescent Core

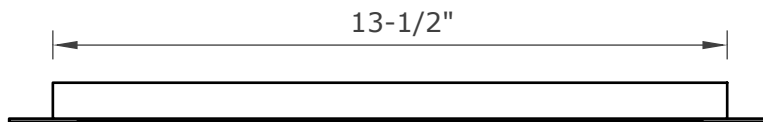

FRONT VIEW

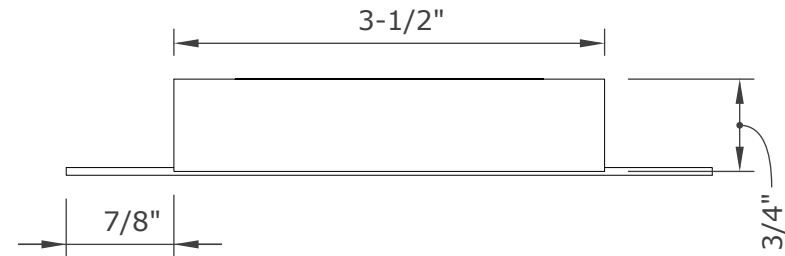

SIDE VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVFS414S PRODUCT SPECIFICATION & DATA SHEET

Model Description	Foundation Vent	Flange Type	Stucco	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVFS414S			Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	13-1/2" x 3-1/2"	NFVA	24 sq. in.	Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:



www.newcalmetals.com