





V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

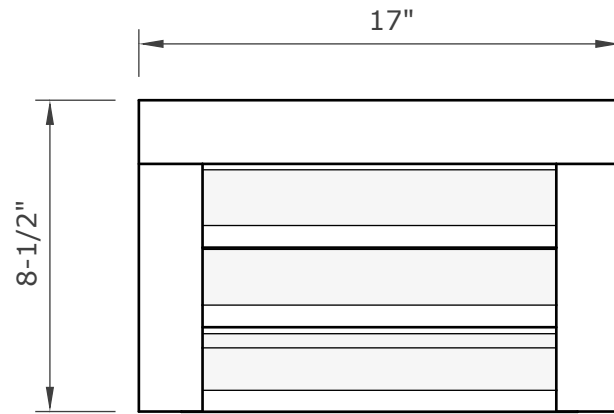


TOP VIEW




Intumescent Core

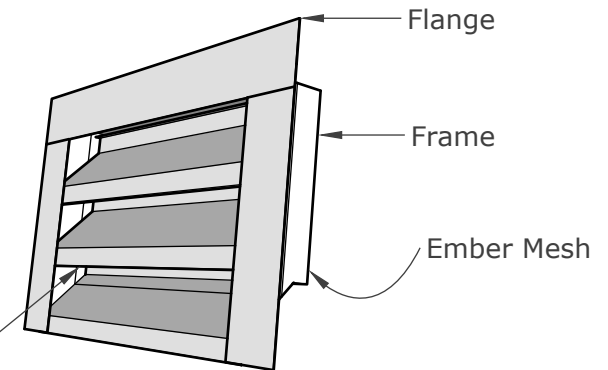

ISOMETRIC VIEW

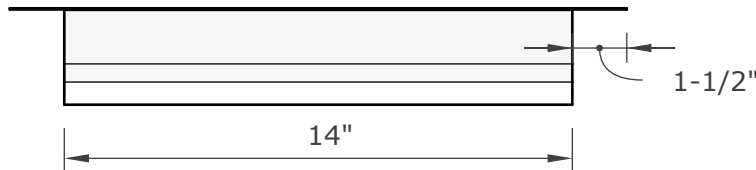

END VIEW

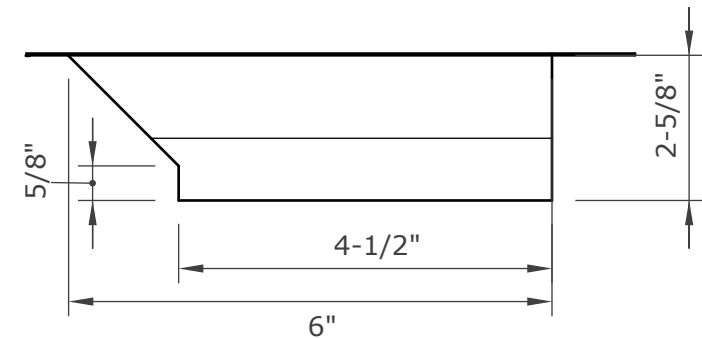

END VIEW

Required Installation:


Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVFS614LFF PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com



Model Description	Foundation Vent	Flange Type	NFVA	Flange Front	20 sq. in.	Frame & Flange	Intumescent Core	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	FSVFS614LFF							5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	6"x 14"							14 Mesh - 304 Stainless Steel
								Stainless Steel Screen - 1/8" (Faces exterior)