





V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

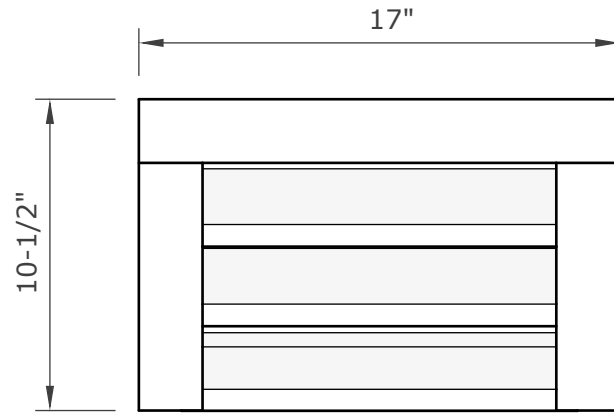


TOP VIEW




Intumescent Core

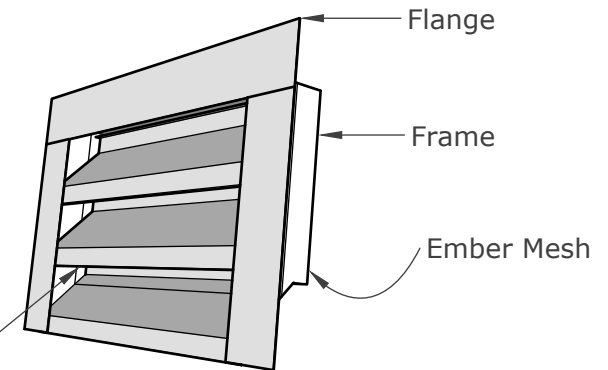

ISOMETRIC VIEW

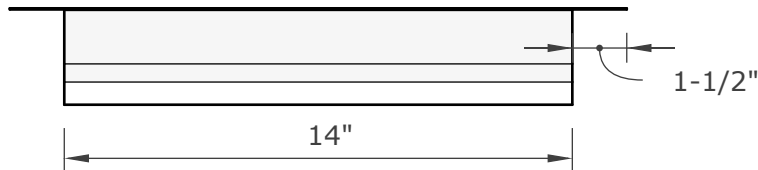

END VIEW

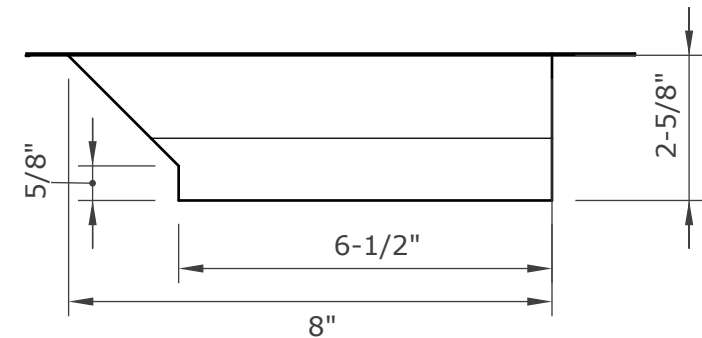

END VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVFS814LFF PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Foundation Vent	Flange Type	NFVA	Flange Front	31 sq. in.	Frame & Flange	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	FSVFS814LFF					Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	8"x 14"					Ember Mesh	14 Mesh - 304 Stainless Steel
						Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)