



Approved for use in the Wildland Urban Interface (W.U.I.)


Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155

Revision Date: February 25, 2026




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

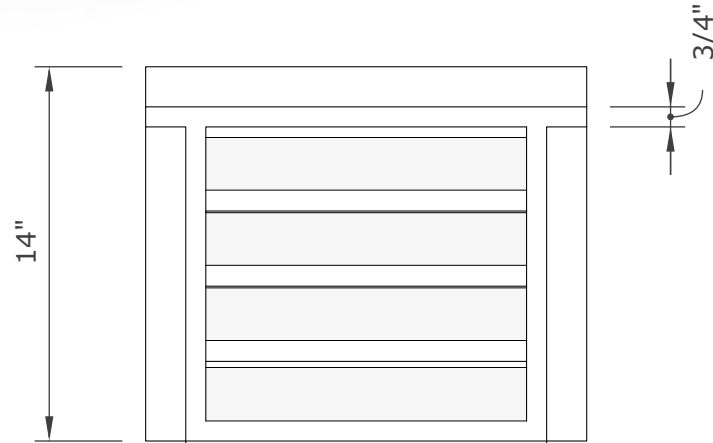


TOP VIEW

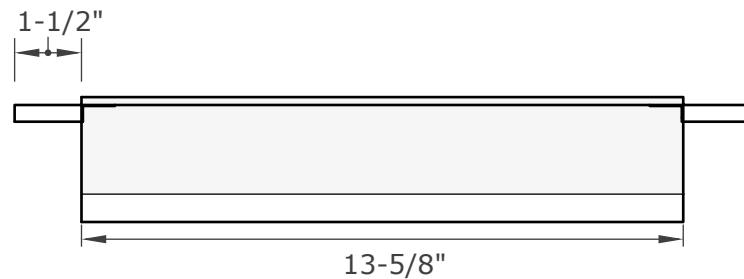


END VIEW



Intumescent Core

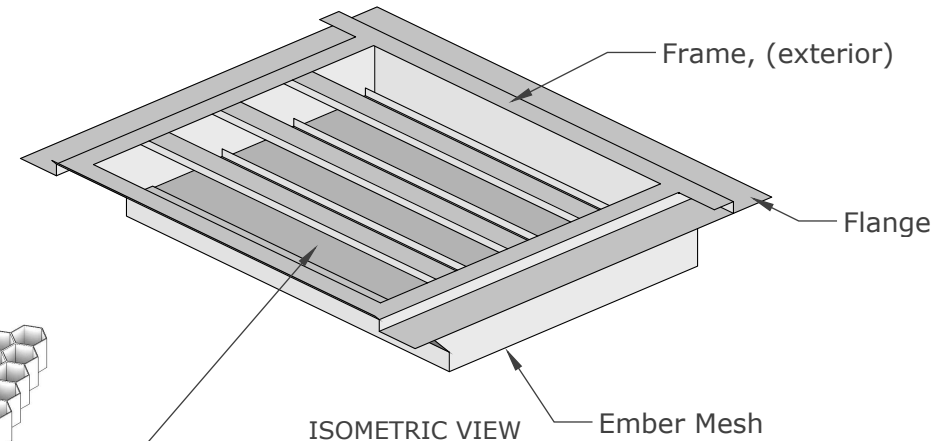

ISOMETRIC VIEW

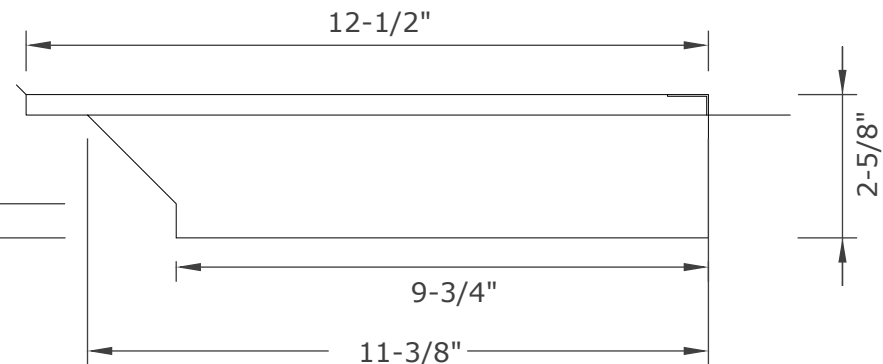

SIDE VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVG1412FC PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description | **Gable Vent**
Model Number | **FSVG1412FC**
Model Size | **13-5/8" x 12-1/2"**

Flange Type | **NFVA**
Fiber Cement | **58 sq. in.**
Frame & Flange | **Intumescent Core**
Ember Mesh | **Pest Screen**

G90 Galvanized Perforated Steel - 26GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel
Stainless Steel Screen - 1/8" (Faces exterior)