



Approved for use in the Wildland Urban Interface (W.U.I.)

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2426 | QAI listing: B1155


Revision Date: February 25, 2026



V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650



**For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A\***

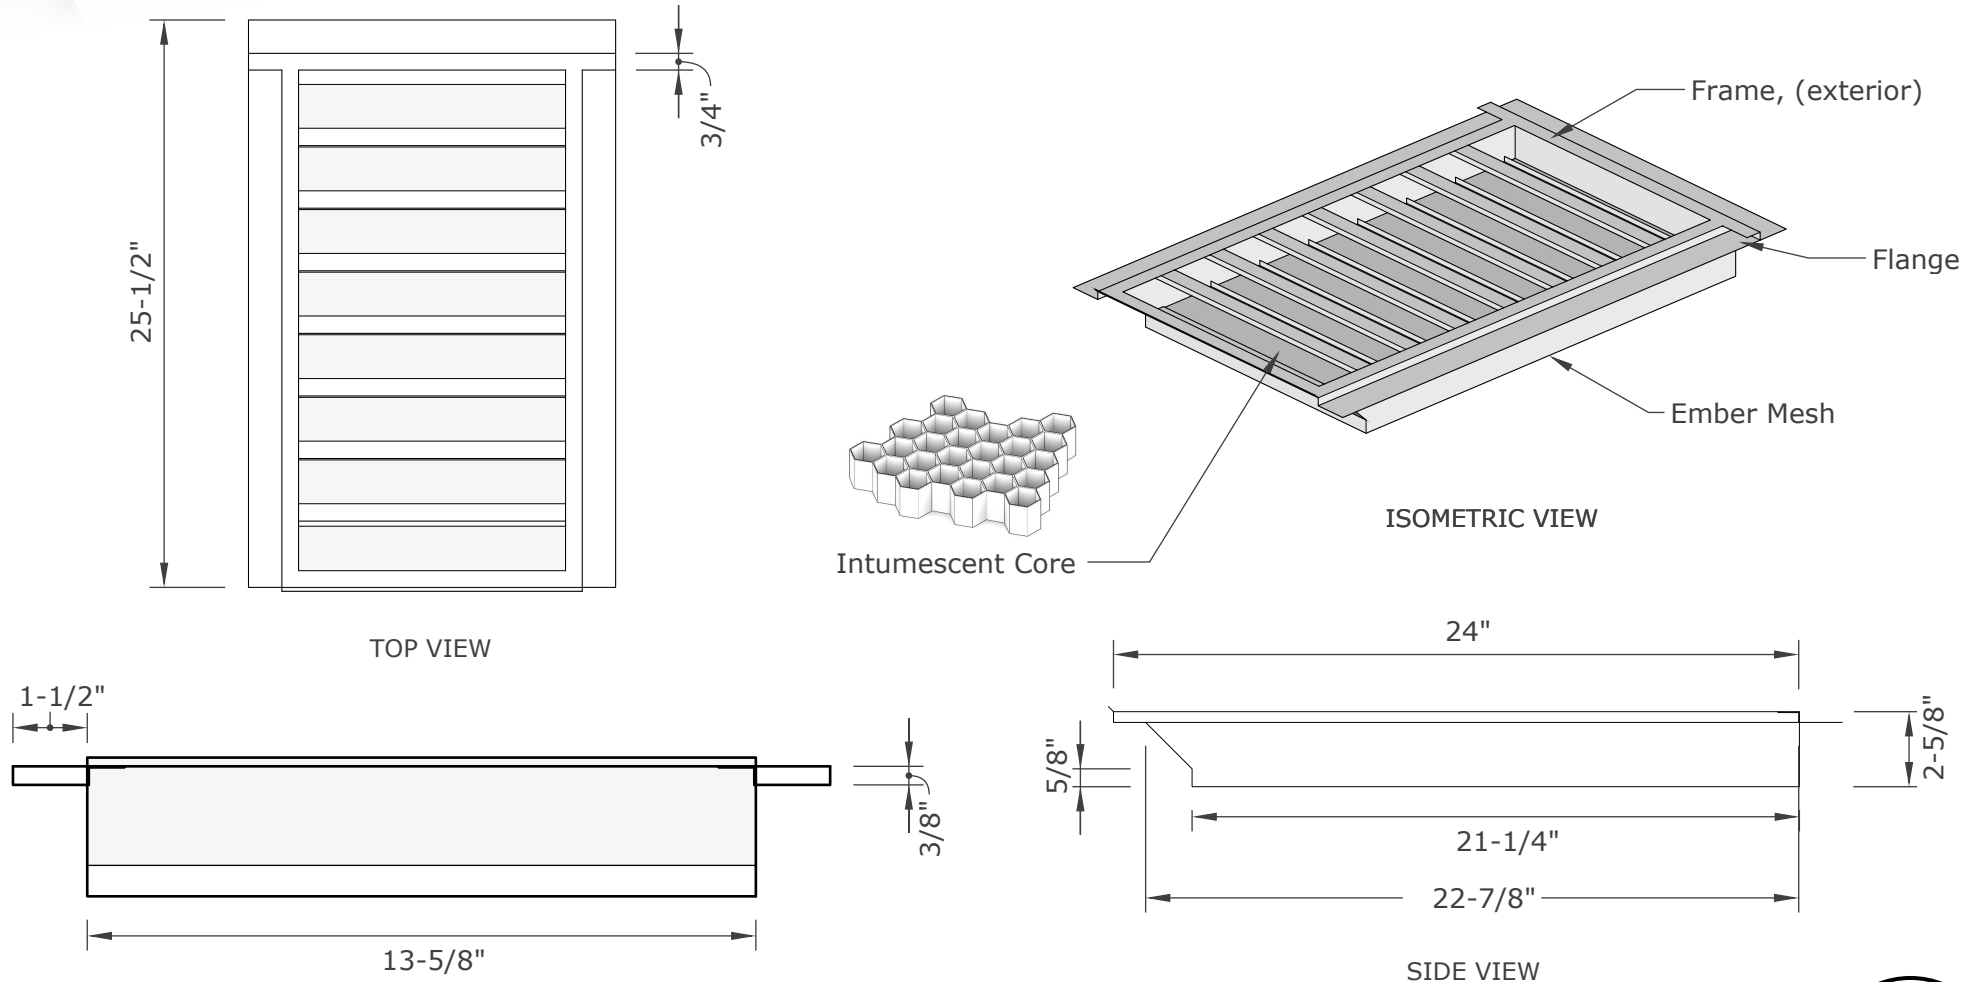

**Required Installation:**

**END VIEW**

**Use EverKem 814+ intumescent firestop caulking** or equivalent, **BEHIND** flanges.

For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

**FSVG1424FC PRODUCT SPECIFICATION & DATA SHEET**

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

|                   |                          |             |                     |                  |                                                                 |
|-------------------|--------------------------|-------------|---------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Gable Vent</b>        | Flange Type | <b>Fiber Cement</b> | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>FSVG1424FC</b>        | NFVA        | <b>115 sq. in.</b>  | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>13-5/8" x 24-1/2"</b> |             |                     | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel</b>                            |
|                   |                          |             |                     | Pest Screen      | <b>Stainless Steel Screen - 1/8" (Faces exterior)</b>           |