




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

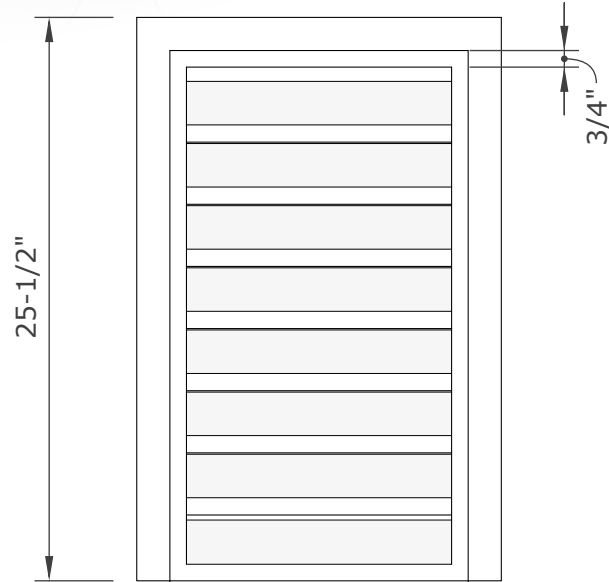


TOP VIEW




Intumescent Core

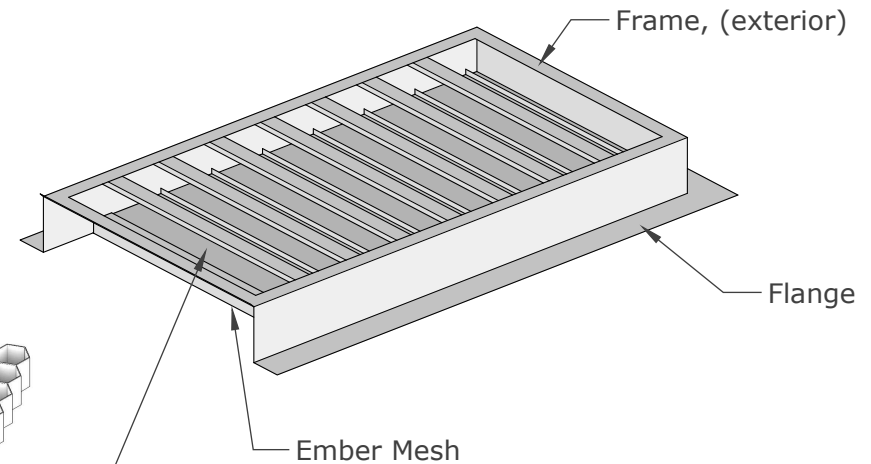

ISOMETRIC VIEW

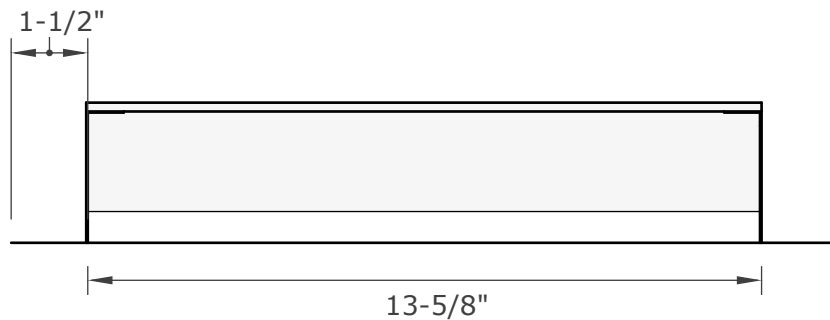

END VIEW

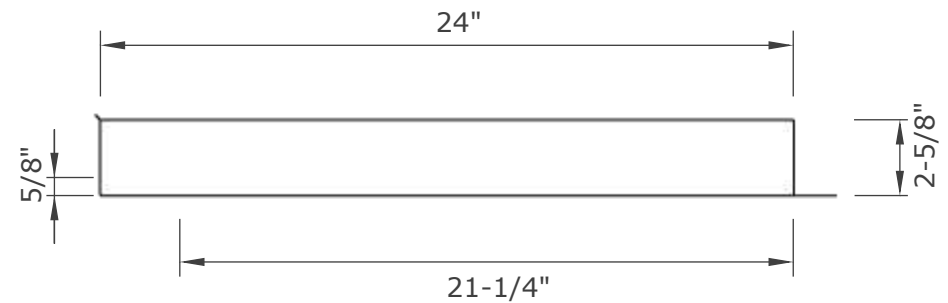

SIDE VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVG1424R PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:

NEW CAL
METALS INC.
www.newcalmetals.com

Model Description | **Gable Vent**
Model Number | **FSVG1424R**
Model Size | **13-5/8" x 24-1/2"**

Flange Type | **Retro**
NFVA | **115 sq. in.**

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Steel - 26GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel
Stainless Steel Screen - 1/8" (Faces exterior)