



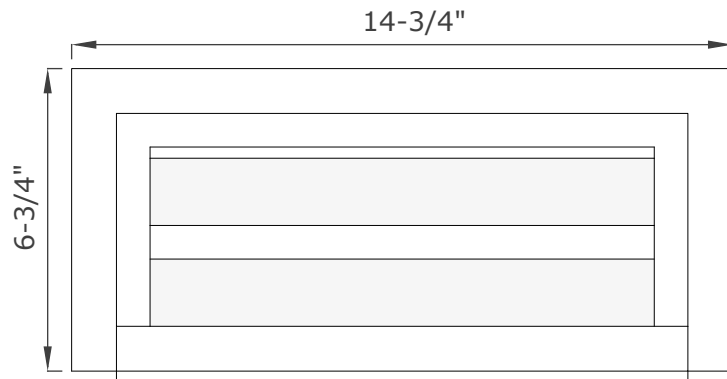


TOP VIEW


Ember Mesh




Intumescent Core

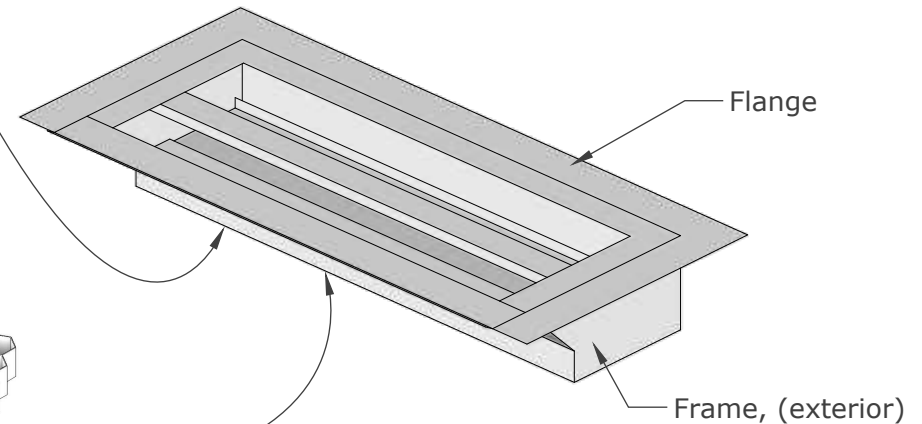

ISOMETRIC VIEW

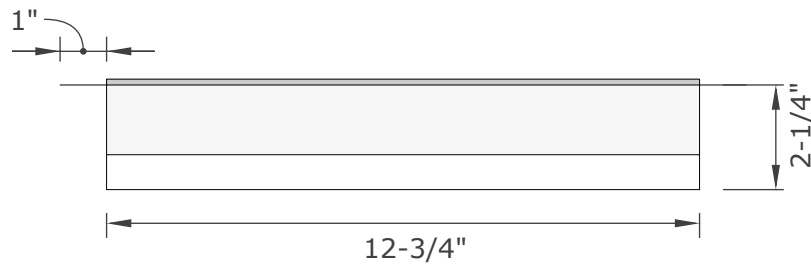

BOTTOM VIEW

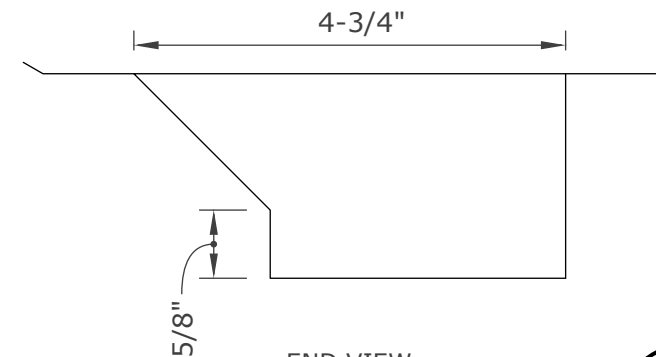

END VIEW

**Required Installation:**

**Use EverKem 814+ intumescent firestop caulking** or equivalent, **BEHIND** flanges.  
For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

**FSVG4.75x12.75FF PRODUCT SPECIFICATION & DATA SHEET**

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

|                   |                         |              |                  |                  |                                                                 |
|-------------------|-------------------------|--------------|------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Gable Vent</b>       | Flange Type  | NFVA             | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>FSVG4.75x12.75FF</b> | Flange Front | <b>24 sq. in</b> | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>4-3/4" x 12-3/4"</b> |              |                  | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel</b>                            |
|                   |                         |              |                  | Pest Screen      | <b>Stainless Steel Screen - 1/8" (Faces exterior)</b>           |