




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

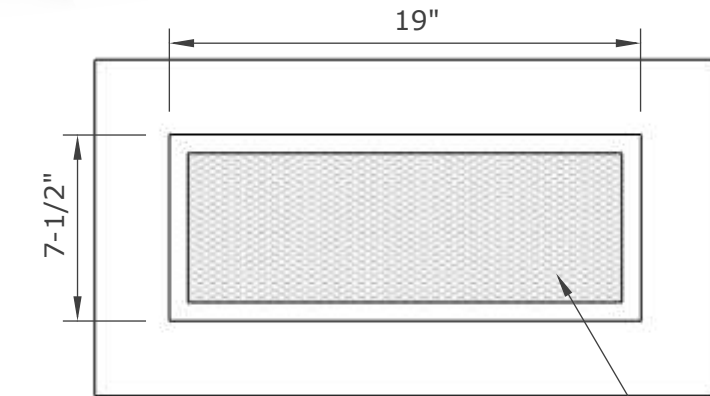


TOP VIEW

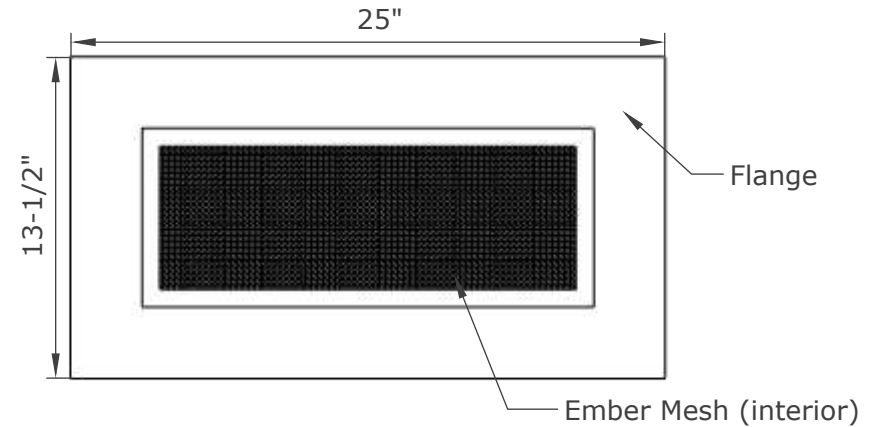


BOTTOM VIEW



Intumescent Core

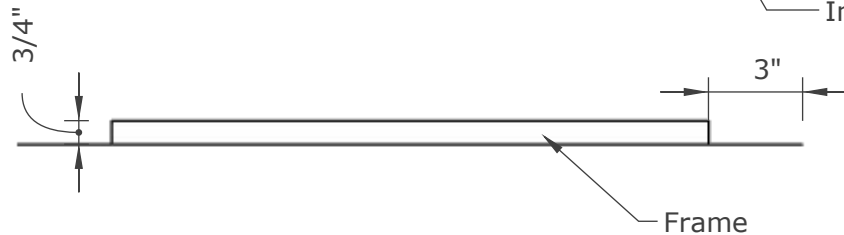

SIDE VIEW

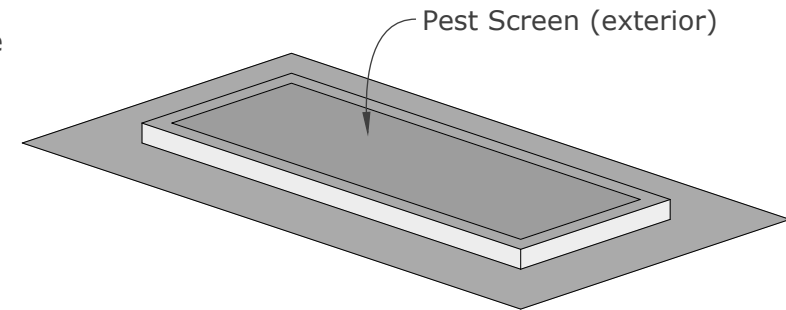

ISOMETRIC VIEW

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVSB7519 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:

NEW CAL
METALS INC.
www.newcalmetals.com

Model Description | **Sub Base Vent**
Model Number | **FSVSB7519**
Model Size | **7-1/2" x 19"**

Flange Type | **3" Flange**
NFVA | **108 sq. in.**

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Steel - 26GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel (Faces interior)
Stainless Steel Screen - 1/8" (Faces exterior)