
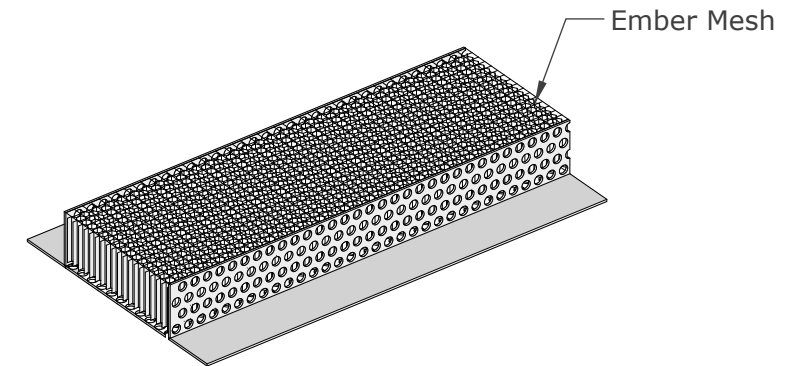
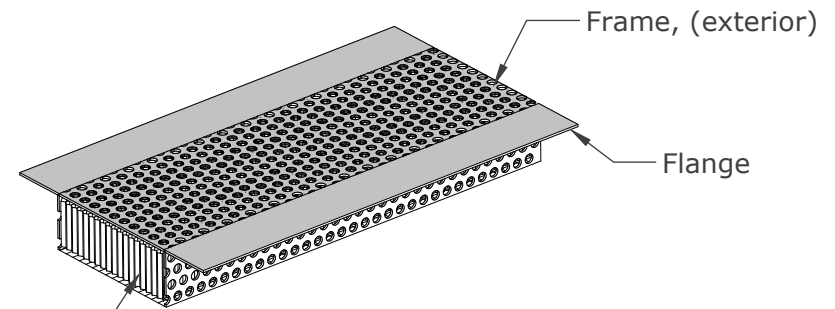

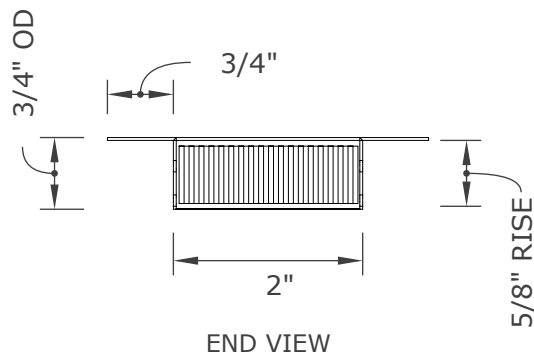


**For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A\***

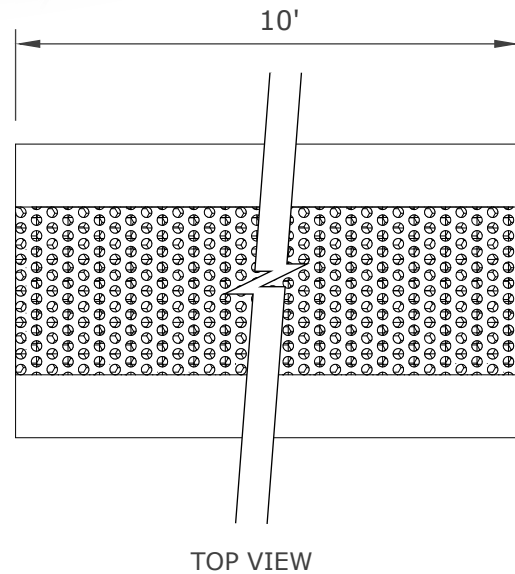

## Reuired Installation:

**Use EverKem 814+ intumescent firestop caulking** or equivalent, **BEHIND** flanges.  
For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

## FSVSC2120FF PRODUCT SPECIFICATION & DATA SHEET

|                   |                        |             |                     |                  |                                                                 |
|-------------------|------------------------|-------------|---------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Continuous Vent</b> | Flange Type | <b>Flange Front</b> | Frame & Flange   | <b>G90 Galvanized Perforated Steel (1/8" holes) - 24GA</b>      |
| Model Number      | <b>FSVSC2120FF</b>     | NFVA        | <b>96 sq. in.</b>   | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>2" x 120"</b>       |             |                     | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel</b>                            |
|                   |                        |             |                     | Pest Screen      | <b>Stainless Steel Screen - 1/8" (Faces exterior)</b>           |

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)