



Approved for use in the Wildland Urban Interface (W.U.I.)


**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2426 | QAI listing: B1155

Revision Date: February 25, 2026




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650


**For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A\***

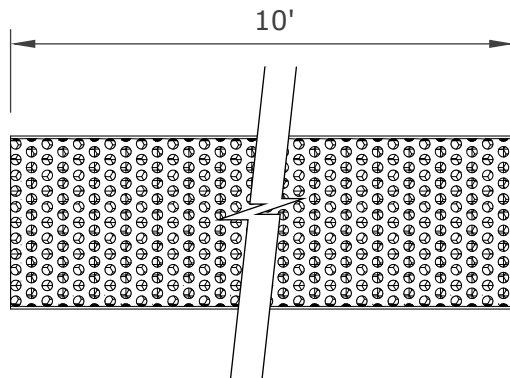


TOP VIEW




END VIEW



Intumescent Core

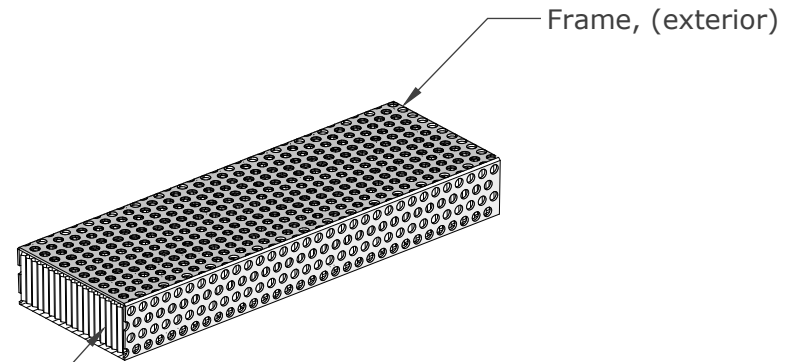

ISOMETRIC VIEWS

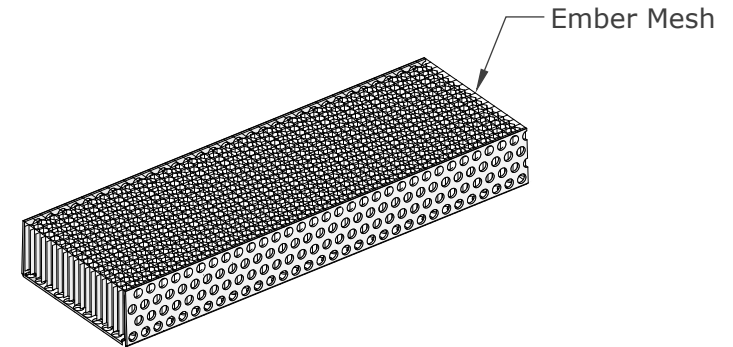

Ember Mesh

#### Required Installation:

**Use EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.

For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

## FSVSC25120R PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

|                   |                        |             |                    |                  |                                                                 |
|-------------------|------------------------|-------------|--------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Continuous Vent</b> | Flange Type | <b>Retrofit</b>    | Frame & Flange   | <b>G90 Galvanized Perforated Steel (1/8" holes) - 24GA</b>      |
| Model Number      | <b>FSVSC25120R</b>     | NFVA        | <b>120 sq. in.</b> | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>2-1/2" x 120"</b>   |             |                    | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel</b>                            |
|                   |                        |             |                    | Pest Screen      | <b>Stainless Steel Screen - 1/8" (Faces exterior)</b>           |