








Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155



V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650

For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

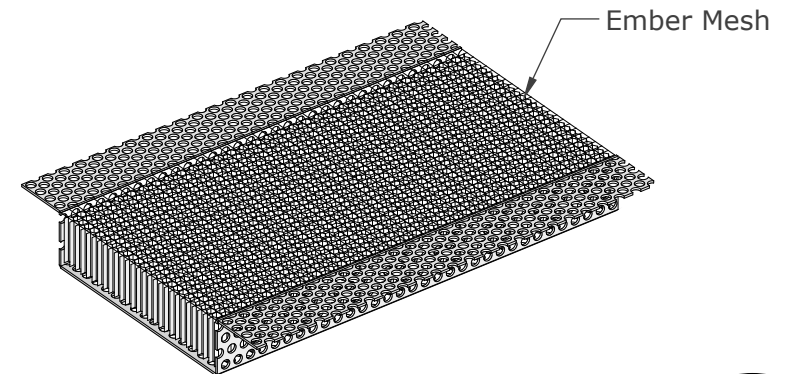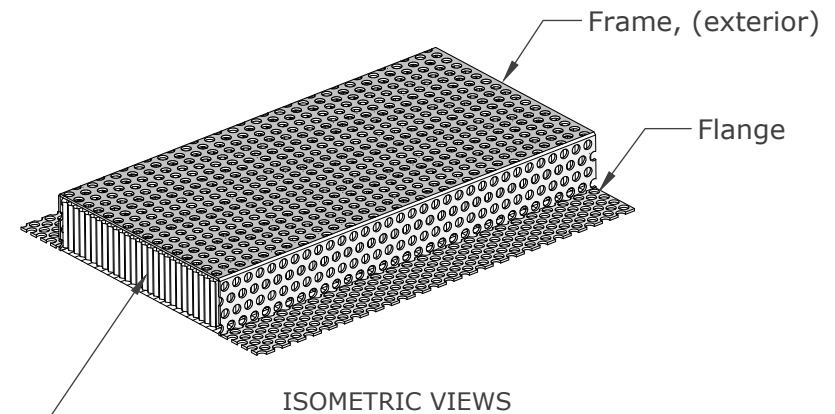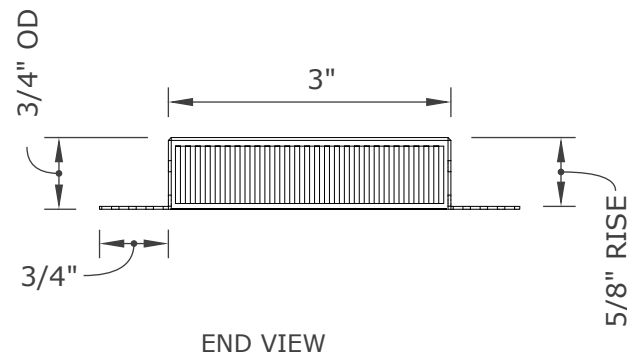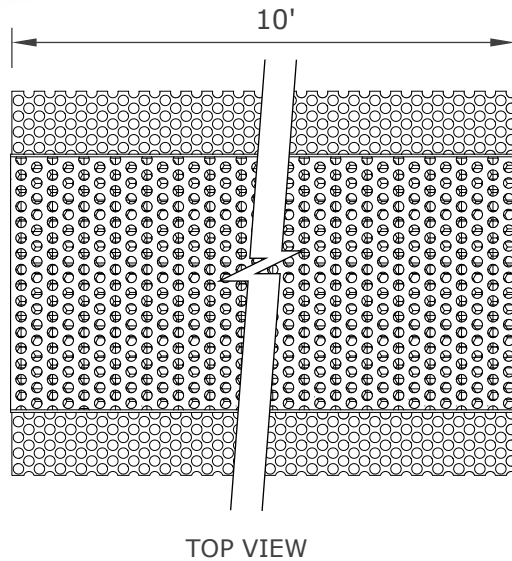

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVSC3120 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Continuous Vent	Flange Type	Standard
Model Number	FSVSC3120	NFVA	144 sq. in.
Model Size	3" x 120"		

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Perforated Steel (1/8" holes) - **24GA**
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel
Stainless Steel Screen - 1/8" (Faces exterior)