



Approved for use in the Wildland Urban Interface (W.U.I.)


Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155

Revision Date: February 25, 2026




V2VENTS.COM (916) 652-7424 info@firestormbuildingproducts.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

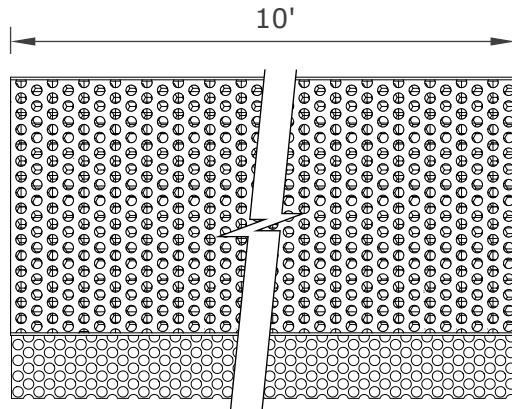


TOP VIEW

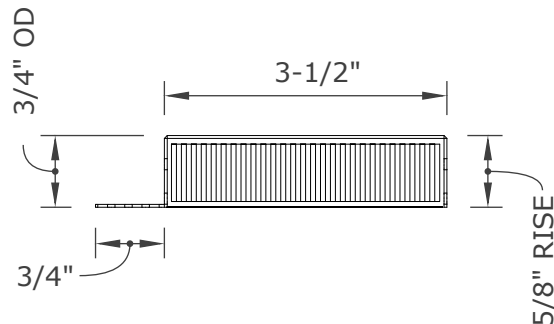


END VIEW



Intumescent Core

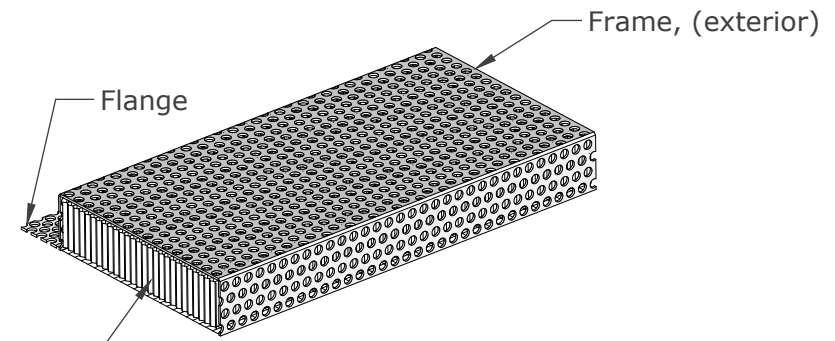

ISOMETRIC VIEWS

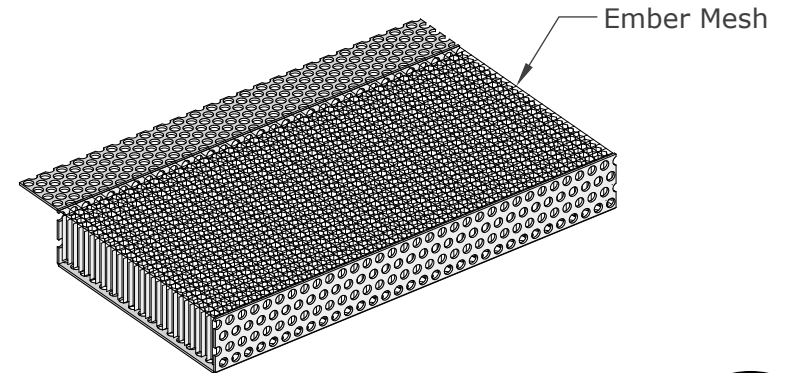

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.

For application details and installation examples, please visit www.V2Vents.com

FSVSC35120SL PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description | **Continuous Vent**
Model Number | **FSVSC35120SL**
Model Size | **3-1/2" x 120"**

Flange Type | **Single-Leg**
NFVA | **168 sq. in.**

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Perforated Steel (1/8" holes) - 24GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel
Stainless Steel Screen - 1/8" (Faces exterior)