




For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

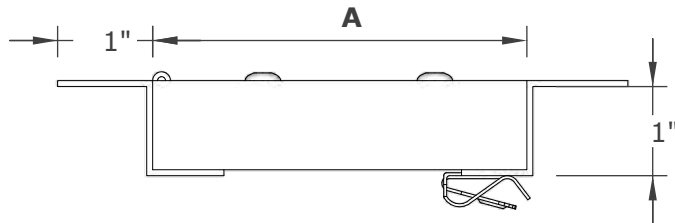

End View




* Low profile, hinged assembly for easy inspections.

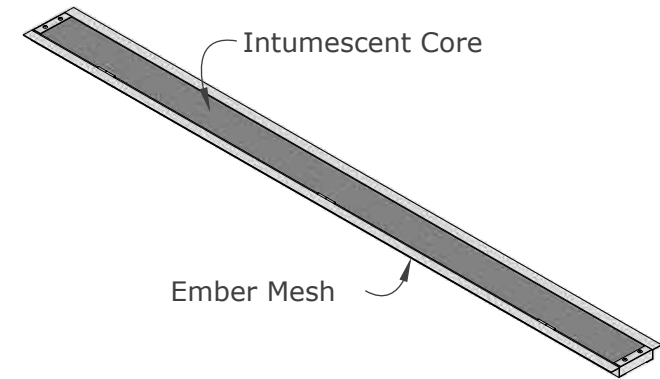

Isometric View


For use to comply with SB 721, SB 326 where decks and balconies (EEE) require inspection. V2 Vents have been tested and listed to ASTM E2886 and carry a 1 hour fire rating listed by ICC. All NFVA have been verified by ICC's engineering division.

A	B	C	NFVA
4"	24"	6"	39 SI
4"	36"	6"	58 SI
4"	48"	6"	77 SI
4"	60"	6"	96 SI
4"	72"	6"	115 SI
4"	120"	6"	192 SI

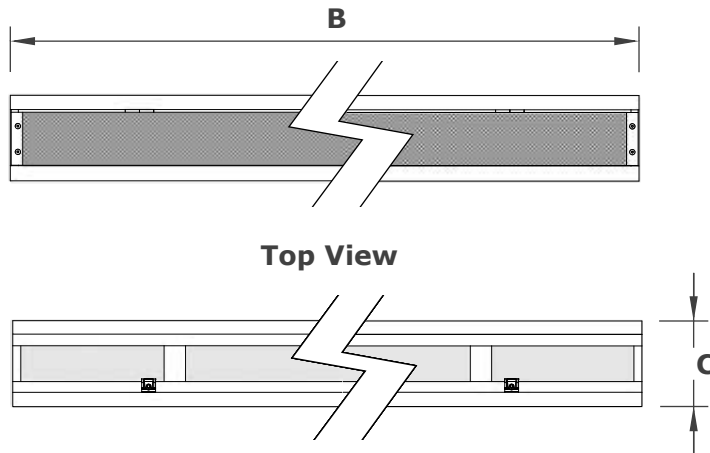

Top View

Bottom View



Quick, secure access.

Required Installation:

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

* Door is interchangeable with our non-fire rated vent option.

Proudly Manufactured By: **NEW CAL** METALS INC.

www.newcalmetals.com

FSVSC4120IF PRODUCT SPECIFICATION & DATA SHEET

Model Description	Continuous	Flange Type	Inspection
Model Number	FSVSC4120IF	NFVA	192 sq. in.
Model Size	120" x 4"		

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Steel - 24GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel (Faces interior)
Stainless Steel Screen - 1/8" (Faces exterior)