
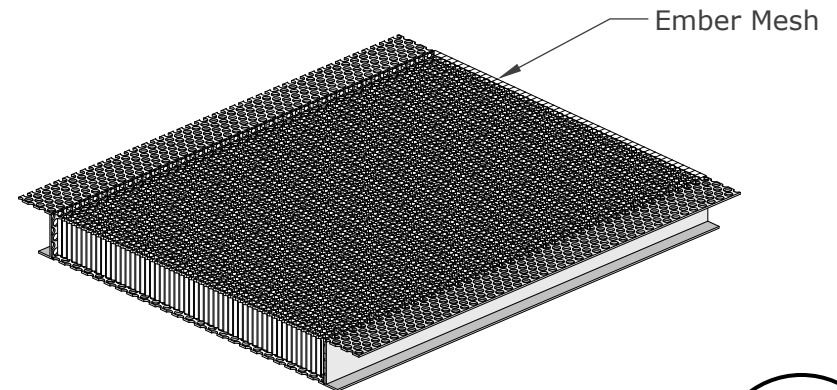
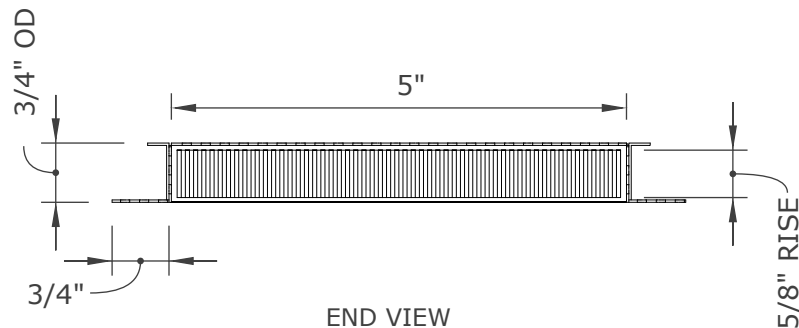
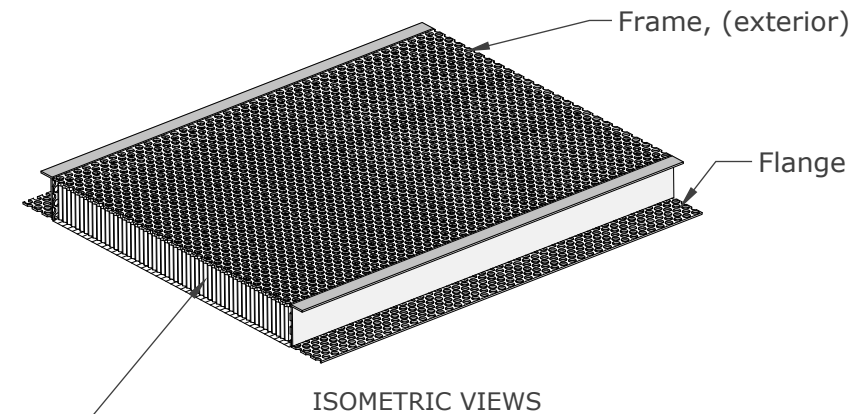



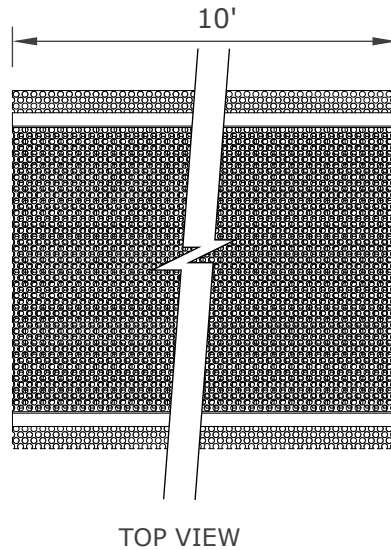

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVSC5120SMC34 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:

NEW CAL
METALS INC.
www.newcalmetals.com

Model Description	Continuous Vent	Flange Type	Stucco MilCor 3/4"	Frame & Flange	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	FSVSC5120SMC34	NFVA	240 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	5" x 120"			Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)