




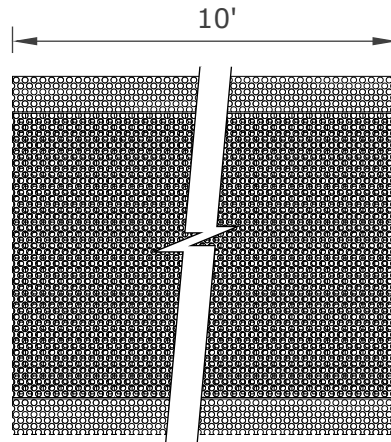


TOP VIEW




Intumescent Core

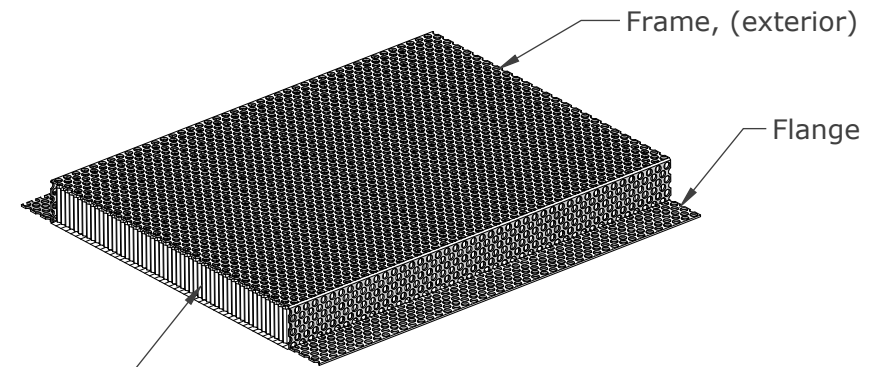

ISOMETRIC VIEWS

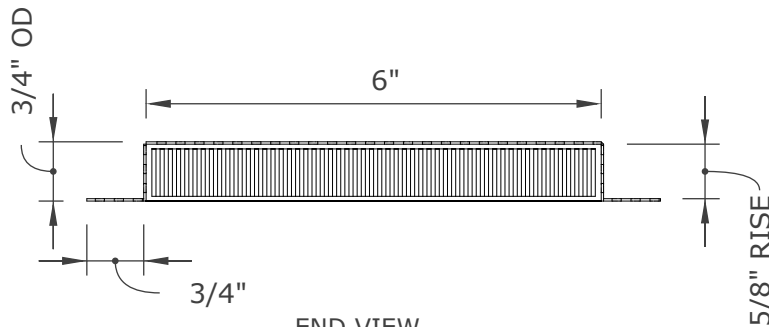

END VIEW

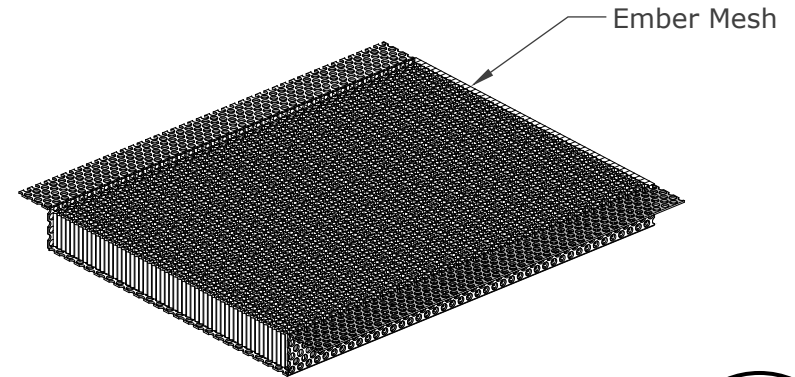

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVSC6120 PRODUCT SPECIFICATION & DATA SHEET

Model Description	Continuous Vent	Flange Type	Standard
Model Number	FSVSC6120	NFVA	288 sq. in.
Model Size	6" x 120"		

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Perforated Steel (1/8" holes) - 24GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel
Stainless Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:

NEW CAL
METALS INC.
www.newcalmetals.com