




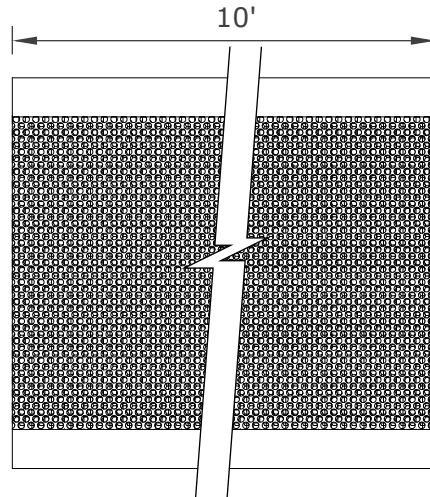


TOP VIEW

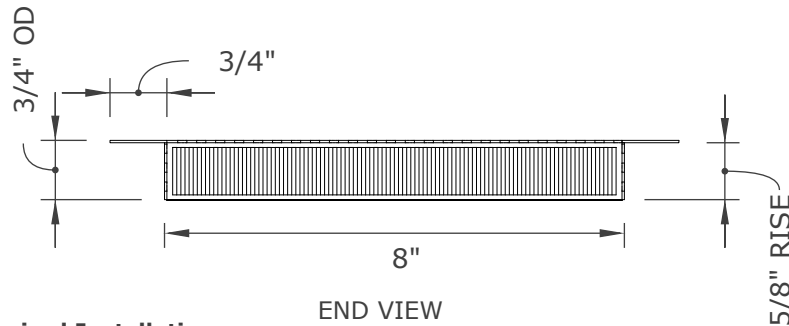


END VIEW



Intumescent Core

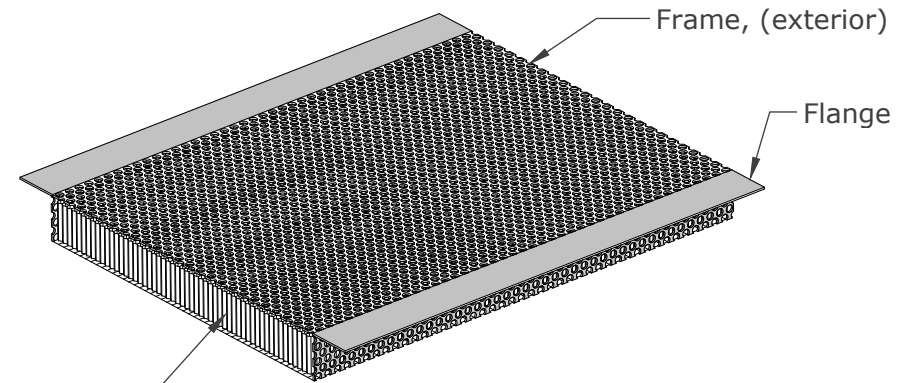

ISOMETRIC VIEWS

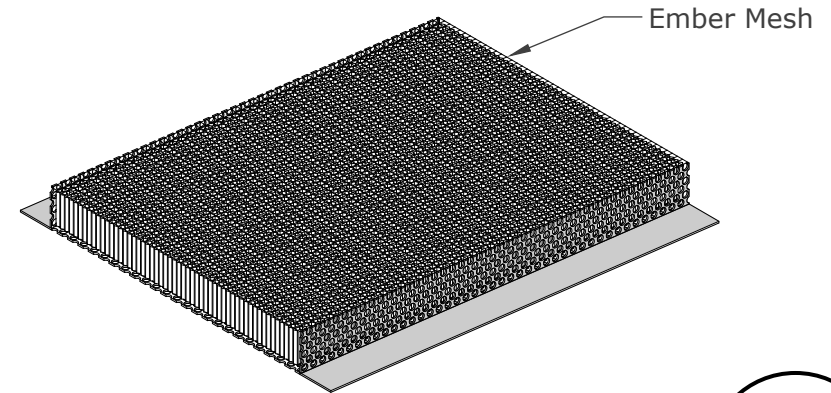

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, **BEHIND** flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVSC8120FF PRODUCT SPECIFICATION & DATA SHEET

Model Description	Continuous Vent	Flange Type	NFVA	Flange Front	394 sq. in.	Frame & Flange	Intumescent Core	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	FSVSC8120FF							5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	8" x 120"							14 Mesh - 304 Stainless Steel
								Stainless Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:



www.newcalmetals.com