
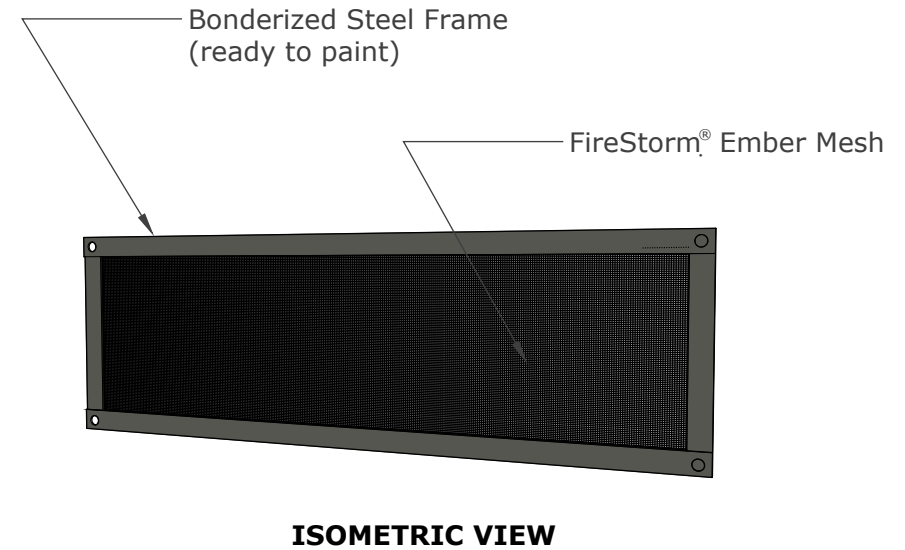


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

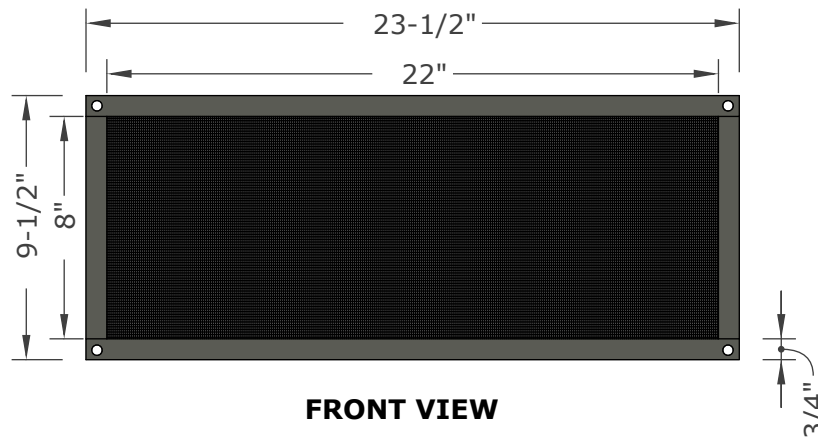

Installation Notes:

May be installed over existing ventilation (retrofit), or installed stand-alone. They can be installed from the exterior or from the interior side.

Always ensure that there are no gaps between the nailing flange and the building exterior where burning embers may enter.

Always use appropriate fasteners designed for your building material, .i.e. stucco vs wood, etc.

Nailing flange is bonderized steel and ready to paint as is! No prep or primer needed.

FireStorm Ember Mesh screen is powder coated and does not need paint. Ember Mesh may be painted if other coloring is desired. Optional

EverKem 814+ intumescent fire caulking is recommended to seal gaps.

*vertical installation

EMBER MESH SPECIFICATIONS

GRADE	304 Stainless Steel
FINISH	Thermal Powder Coating
APERTURE	0.0657"
WIRE DIAMETER	0.018"
WEIGHT	.0248 lbs / Per SF.

FSEV-F822FL-BD PRODUCT SPECIFICATION & DATA SHEET

Model Description	Foundation/Soffit	Flange Type	Universal	Frame & Flange	Bonderized Steel - 26GA
Model Number	FSEV-F822FL-BD	NFVA	101.2 SI	Ember Mesh Finish	Powder Coated 13 Mesh - 304 Stainless Steel
Model Size	9-1/2" x 23-1/2"			Ember Mesh Dimensions	Wire diameter: .018" Aperture .0657"

Proudly Manufactured By:



www.newcalmetals.com